



NB310L Residual Current Operated Circuit Breaker with over-current protection (Magnetic)

1. General

1.1 Function

Personnel and fire protection: Cable and line protection against overload and short-circuits.

1.2 Selection

Rated residual operating current

$I_{\Delta n} = 30\text{mA}, 300\text{mA}$: additional protection in the case of direct contact.

Tripping class

A and AC class

A class tripping is ensured for sinusoidal, alternating residual currents as well as for pulsed DC residual currents, whether they be quickly or slowly increase.

AC class tripping is ensured for sinusoidal, alternating residual currents, whether they be quickly or slowly increase.

Tripping curve

B curve ($I_1 = 1.13I_n$; $I_2 = 1.45I_n$; $I_4 = 3I_n$; $I_5 = 5I_n$) protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems.

C curve ($I_1 = 1.13I_n$; $I_2 = 1.45I_n$; $I_4 = 5I_n$; $I_5 = 10I_n$) protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.

BK curve ($I_1 = 1.05I_n$; $I_2 = 1.3I_n$; $I_4 = 3I_n$; $I_5 = 5I_n$) protection and control of the circuits against overloads and short-circuits;

protection for people and big length cables in TN and IT systems.

CK curve ($I_1 = 1.05I_n$; $I_2 = 1.3I_n$; $I_4 = 5I_n$; $I_5 = 10I_n$) protection and control of the circuit against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.

1.3 Approvals and certificates

CE/CB/KEMA

1.4 Add-on devices

XF9 auxiliary contacts

S9 shunt release

V9 under voltage release





OUVT-1 over voltage

release



2. Technical data

2.1 Curves

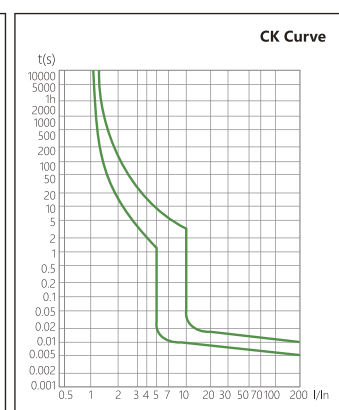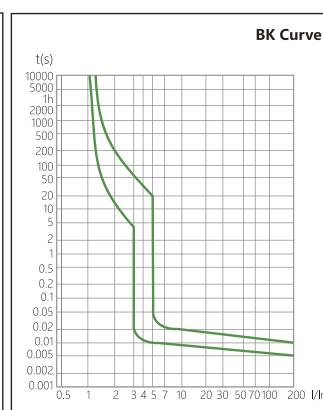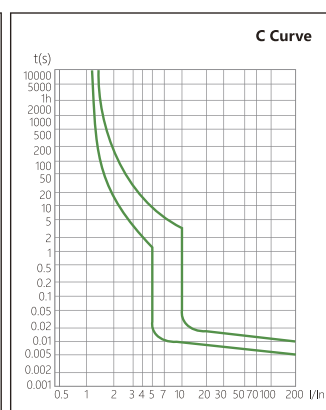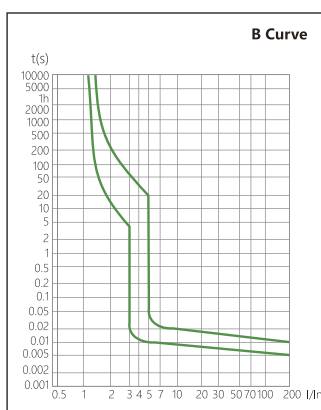

2.2

	Standard	IEC/EN 61009-1				
Electrical features	Type (wave form of the earth leakage sensed)	A			A,AC	
	Thermo-magnetic release characteristic	B,C		BK,CK	B,C	
	Rated current I _n	A	6, 10, 13, 16	20, 25, 32	10,13,15	6, 10, 13, 16, 20, 25, 32, 40
	Poles	2P			3P+N	
	Rated voltage U _e	V	110/230/240			230/400
	Rated sensitivity I _{Δn}	A	0.03			0.03,0.3
	Rated residual making and breaking capacity I _{Δm}	A	3,000			
	Rated short-circuit capacity I _{cn}	A	6,000 , 10,000	6,000	10,000	6,000
	Break time under I _{Δn}	s	≤0.1			
	Rated frequency	Hz	50/60			
	Rated impulse withstand voltage (1.2/50)U _{imp}	V	4,000			4,000
	Dielectric TEST voltage at ind. Freq. for 1 min	kV	2			
	Insulation voltage U _i	V	500			
	Pollution degree		2			
Mechanical features	Electrical life	2,000				
	Mechanical life	20,000			10,000	
	Contact position indicator	Yes				
	Protection degree	IP20				
	Ambient temperature (with daily average ≤35°C)	°C	-25...+40			
	Storage temperature	°C	-25...+70			
Installation	Terminal connection type	Cable/U-type busbar/Pin-type busbar				
	Terminal size top/bottom for cable	mm ²	25			
		AWG	18-3			
	Terminal size top/bottom for busbar	mm ²	10			
		AWG	18-8			
	Tightening torque	N·m	2			
		In-lbs.	18			
Mounting	On DIN rail EN 60715 (35mm) by means of fast clip device					
Connection	From top and bottom					

2.3 Temperature derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed.

The reference temperature is 30°C

Temperature	-25°C	-20°C	-10°C	0°C	10°C	20	30°C	40°C	50°C	60°C	70°C
Temperature compensation coefficient of rated current	1.27	1.25	1.20	1.15	1.10	1.05	1.00	0.95	0.90	0.85	0.80

3. Overall and mounting dimensions (mm)

