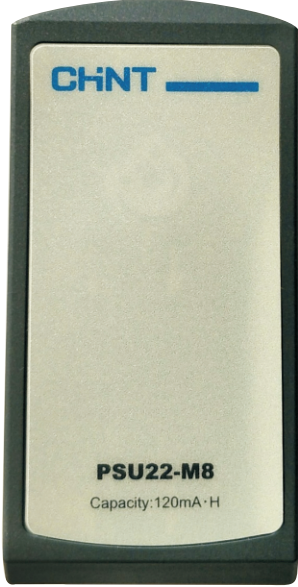


70克双胶纸 折好成品规格92X130mm

<p>Certificate of qualification CHNT</p> <div style="border: 1px solid black; padding: 10px; text-align: center;">  <h2 style="margin: 0;">QC PASS</h2> <p style="margin: 5px 0;">PSU22-M8 Battery Case IEC/EN 60947-2</p> <div style="border: 1px solid red; padding: 2px; display: inline-block; margin: 5px 0;"> PD1 Check 30 </div> <p style="font-size: small; margin: 5px 0;">Test date: Please see the Packing</p> <p style="font-size: x-small; margin: 0;">ZHEJIANG CHINT ELECTRICS CO., LTD.</p> </div>	<div style="text-align: center;">  </div> <div style="text-align: center; margin-top: 100px;"> <p>Zhejiang Chint Electrics Co., Ltd.</p> <p style="font-size: x-small;">Add: No.1, CHINT Road, CHINT Industrial Zone, North Baixiang, Yueqing, Zhejiang 325603, P.R.China E-mail: global-sales@chint.com Website: http://en.chint.com</p> </div> <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 20px;">    </div>	<div style="text-align: right;"> <p style="font-size: x-small;">(NO.2020.01)</p>  </div> <div style="text-align: center; margin-top: 50px;"> <p>PSU22-M8 Battery Case</p> <hr/> <h2 style="margin: 0;">User Manual</h2> <hr/> </div> <div style="text-align: right; margin-top: 100px;"> <p style="font-size: x-small;">Standard: IEC/EN 60947-2</p> </div>
--	--	--

<h2 style="text-align: center; border-bottom: 1px solid black; padding-bottom: 5px;">Safety Warnings</h2> <ol style="list-style-type: none"> 1) Installation in any damp, condensed-phase environment with inflammable and explosive gas is forbidden. Do not operate the product with wet hands. 2) You are prohibited from touching the conductive part when the product is operating. 3) Do not install the product at places where gas media can cause metal corrosion and insulation damage. 4) To avoid dangerous accidents, the product must be installed strictly according to the instructions. 5) After unpacking the product, check if the product is damaged and the items are complete. 	<div style="text-align: right;"> <p style="font-size: x-small;">CHNT PSU22-M8 Battery Case User Manual</p> </div> <ol style="list-style-type: none"> 1 Application Range This document is applicable to the battery case of the electronic type moulded case circuit breaker. 2 Operating Conditions <ul style="list-style-type: none"> • Operating temperature -20°C~+40°C 3 Performance Parameters <ol style="list-style-type: none"> 3.1 Product model and definitions PSU refers to battery case 22 refers to universal accessory of standard type electronic moulded case circuit breaker with LCD M8 refers to NM8N series 3.2 Basic parameters and main performance indicators <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <tr> <td style="padding: 2px;">Operating output voltage</td> <td style="padding: 2px;">DC 9V</td> </tr> <tr> <td style="padding: 2px;">Duration</td> <td style="padding: 2px;">7h</td> </tr> </table> 	Operating output voltage	DC 9V	Duration	7h	<div style="text-align: right;"> <p style="font-size: x-small;">PSU22-M8 Battery Case User Manual CHNT</p> </div> <div style="text-align: center; margin-top: 50px;">  </div> <div style="text-align: center; margin-top: 20px;"> <p style="font-size: x-small;">01</p> </div>
Operating output voltage	DC 9V					
Duration	7h					